



PANEL INSTALLATION SHOWN
 Mortar: Western Type- S
 Joint Type: raked
 Size: h: 11 1/4", l: 23 3/4" - sanded finish



CUT STONE
SMOKED FOG
PANELS, CUT STONE
BLOCKS & SLABS

GEOLOGY: limestone - quarried in USA

COLOR RANGE
 gray, blue-gray, and charcoal; swirls common; occasional flecks of green

COLOR CONSISTENCY PER BLOCK/SLAB
 somewhat consistent

WEIGHT CALCULATED IN INCHES
 l x w x h / 1728 (inches cubed) x 145 = approx
 145 pounds per cubic foot


ASTM TESTING DATA
 SMOKED FOG C97 water absorption—6.74%
 SMOKED FOG C97 density—137.2 pcf
 SMOKED FOG C97 specific gravity—2.2
 SMOKED FOG C170 compressive
 strength parallel dry - 6,471 psi
 SMOKED FOG C170 compressive
 strength perpendicular dry —7,567 psi
 SMOKED FOG C170 compressive
 strength parallel wet - 4175 psi
 SMOKED FOG C170 compressive
 strength perpendicular wet —4,446 psi



www.buechelstone.com

ARCHITECT/DESIGNER INFO
MATERIAL BANK

SKU: SM09009

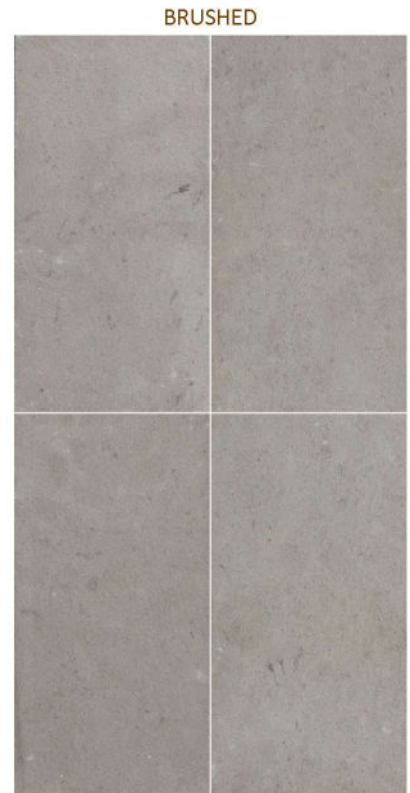

BIM DETAILS

Revit, Hatch Patterns,
 Seamless Textures, 3-Part
 Specs, DWGS, SDS,
 Warranty



www.buechelstone.com

CUT STONE
SMOKED FOG
PANELS, CUT STONE
& SLABS



COMMON APPLICATIONS
 SMOKED FOG
 ACCESSORIES _____
 (e.g. quoins, keystones, light mounts)
 BALUSTERS & COLUMNS _____
 DOOR & WINDOW SURROUNDS _____
 FIREPLACE SURROUNDS _____
 HEARTHES & MANTELS _____
 PIER CAPS _____
 SILLS _____