



PANEL INSTALLATION SHOWN
Mortar: Western Type S
Joint Type: Struck
Size- 4" x 24" sanded finish

- COMMON APPLICATIONS**
- FOSSIL SPIRE
 - ACCESSORIES _____
(e.g. quoins, keystones, light mounts)
 - BALUSTERS _____
 - DOOR & WINDOW SURROUNDS _____
 - FIREPLACE SURROUNDS _____
 - HEARTHES & MANTELS _____
 - PIER CAPS _____
 - SILLS _____



CUT STONE
FOSSIL SPIRE
PANELS, CUT STONE
BLOCKS & SLABS

GEOLOGY: limestone - quarried in USA

COLOR RANGE
yellows & creams to slight buffs, mocha & cool grays, mottled with occasional fossils; swirls are common

COLOR CONSISTENCY PER BLOCK/SLAB
consistent

WEIGHT CALCULATED IN INCHES
l x w x h / 1728 (inches cubed) x 165 = approx 155 pounds per cubic foot



ASTM TESTING DATA
FOSSIL SPIRE C97 water absorption—0.45%
FOSSIL SPIRE C97 density—165.33 pcf
FOSSIL SPIRE C99 modulus of rupture perpendicular—1980 psi
parallel—2420 psi
FOSSIL SPIRE C170
compressive strength—13,990 psi



ARCHITECT/DESIGNER INFO
MATERIAL BANK
SKU: SM09008



BIM DETAILS
Revit, Hatch Patterns,
Seamless Textures, 3-Part
Specs, DWGS, SDS,
Warranty

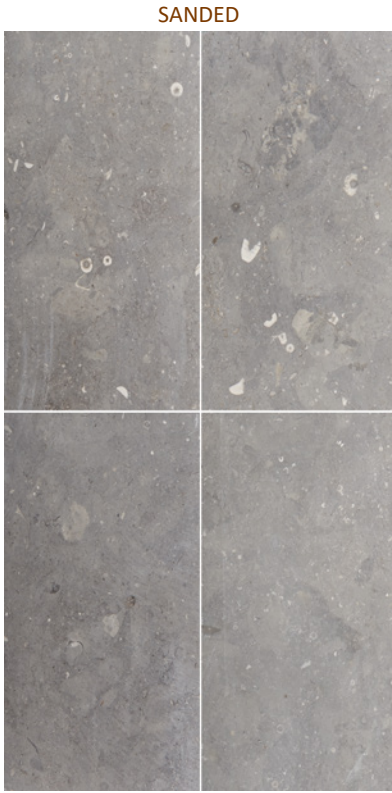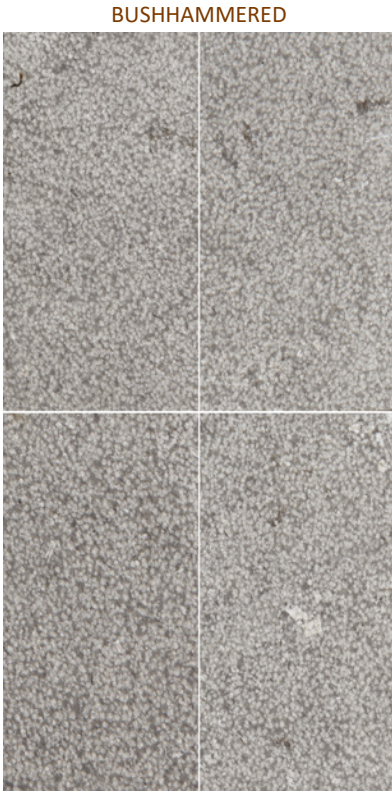

CUT STONE
FOSSIL SPIRE
PANELS, CUT STONE
BLOCKS & SLABS

