



**CUT STONE**  
**WHITE MARIGOLD**  
**PANELS, CUT STONE**  
**BLOCKS & SLABS**

**GEOLOGY:** limestone - quarried in USA

**COLOR RANGE**  
 cream to slight buff, mottled with occasional fossils; swirls are common

**COLOR CONSISTENCY PER BLOCK/SLAB**  
 somewhat consistent

**WEIGHT CALCULATED IN INCHES**  
 l x w x h / 1728 (inches cubed) x 125 = approx  
 125 pounds per cubic foot

**ASTM TESTING DATA**

**WHITE MARIGOLD C97** water absorption—9.43%  
 specific gravity — 2.042 to 2.066  
 density—125.1 lbs/ft<sup>3</sup>  
**WHITE MARIGOLD C170**  
 dry perpendicular—5,490 psi  
 wet perpendicular—3,680 psi  
 dry parallel —4,530 psi  
 wet parallel—3,420 psi  
**WHITE MARIGOLD C880**  
 flexural strength-wet —500 psi  
 flexural strength-dry —700 psi  
**WHITE MARIGOLD C1353**  
 abrasion—3.5  
**WHITE MARIGOLD ANSI A326.3**  
 friction—0.83



**PANEL INSTALLATION SHOWN**

Mortar: Laticrete MVIS  
 Joint Type: drystack  
 Size: h: 4"x random length- sanded finish



**ARCHITECT/DESIGNER INFO**  
**MATERIAL BANK**

SKU: SM09020

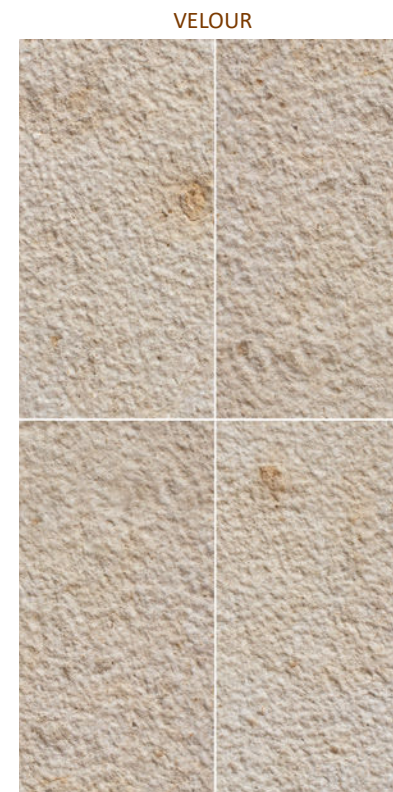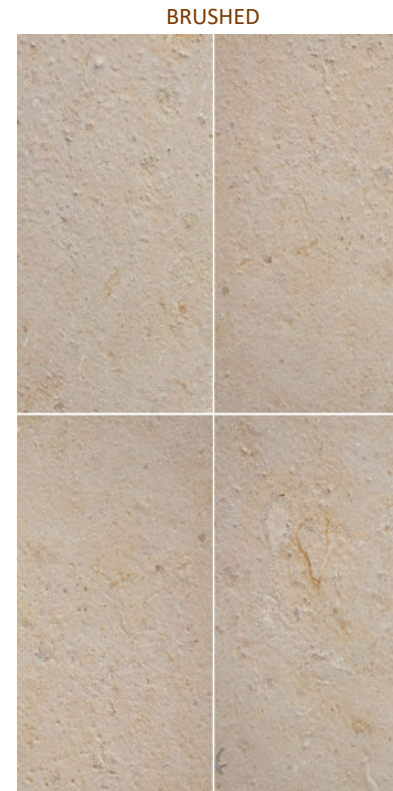


**BIM DETAILS**

Revit, Hatch Patterns,  
 Seamless Textures, 3-Part  
 Specs, DWGS, SDS,  
 Warranty



**CUT STONE**  
**WHITE MARIGOLD**  
**PANELS, CUT STONE**  
**& SLABS**

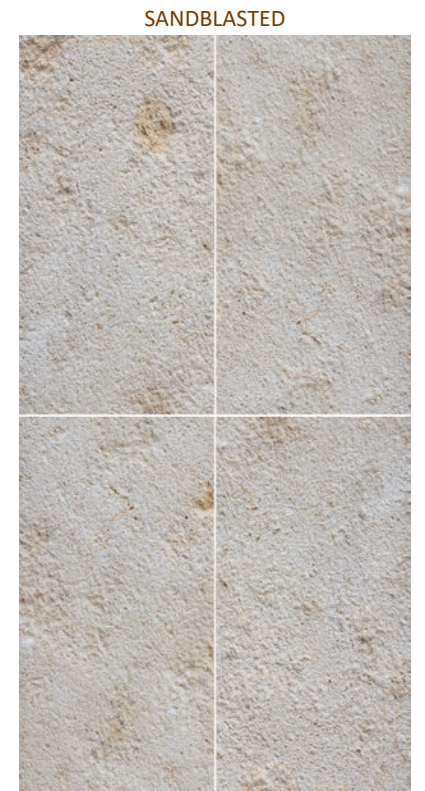

**COMMON APPLICATIONS**

- WHITE MARIGOLD**
- ACCESSORIES \_\_\_\_\_  
 (e.g. quoins, keystones, light mounts)
  - BALUSTERS & COLUMNS \_\_\_\_\_
  - DOOR & WINDOW SURROUNDS \_\_\_\_\_
  - FIREPLACE SURROUNDS \_\_\_\_\_
  - HEARTHES & MANTELS \_\_\_\_\_
  - PIER CAPS \_\_\_\_\_
  - SILLS \_\_\_\_\_

