



PANEL INSTALLATION SHOWN
 Mortar: Western W-11
 Joint Type: raked
 Size- 11 5/8" x 23 5/8" sanded finish



CUT STONE
INDIANA SILVER BUFF
PANELS, CUT STONE
& SLABS

GEOLOGY: limestone - quarried in USA

COLOR RANGE
 light buff to light gray

COLOR CONSISTENCY PER BLOCK/SLAB
 consistent

WEIGHT CALCULATED IN INCHES
 l x w x h / 1728 (inches cubed) x 155
 = approx 155 pounds per cubic foot


ASTM TESTING DATA

INDIANA C97 water absorption—4.84%
 INDIANA C97 specific gravity—2.27 to 2.28
 INDIANA C99 modulus of rupture
 wet perpendicular—653 psi
 wet parallel—727 psi
 dry perpendicular—843 psi
 dry parallel—784 psi
 INDIANA C170 compressive strength
 wet perpendicular—5,735 psi
 wet parallel—4,693 psi
 dry perpendicular—6,581 psi
 dry parallel—5,845 psi
 INDIANA C880 flexural strength
 wet perpendicular—544 psi
 wet parallel—556 psi
 dry perpendicular—716 psi
 dry parallel—706 psi



ARCHITECT/DESIGNER INFO
MATERIAL BANK

SKU: SM09015

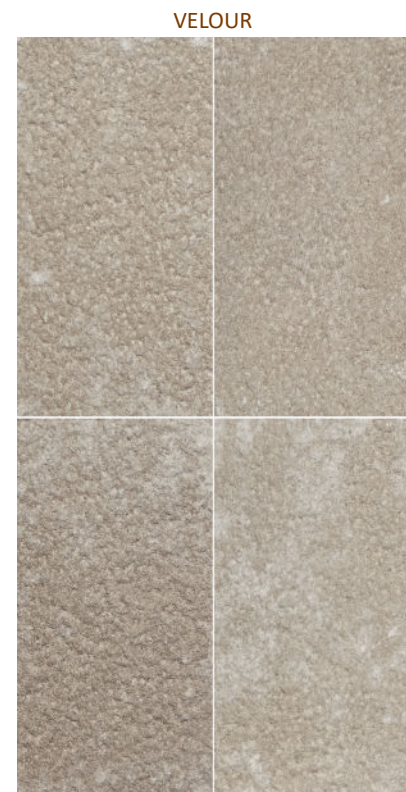

BIM DETAILS

Revit, Hatch Patterns,
 Seamless Textures, 3-Part
 Specs, DWGS, SDS,
 Warranty



CUT STONE

INDIANA SILVERBUFF
PANELS, CUT STONE
& SLABS



COMMON APPLICATIONS

- INDIANA SILVERBUFF
- ACCESSORIES _____
- (e.g. quoins, keystones, light mounts)
- BALUSTERS & COLUMNS _____
- DOOR & WINDOW SURROUNDS _____
- FIREPLACE SURROUNDS _____
- HEARTHES & MANTELS _____
- PIER CAPS _____
- SILLS _____