



**TAILORED
FIELDLEDGE**
**HIGHLAND
GRAY TAILORED
FIELDLEDGE**

GEOLOGY: schist

BASIC USE

exterior walls of buildings and fireplaces
stone shall be mortared in

COLOR RANGE

grays and whites with black veining,
occasional buffs, tans, golds, oranges,
browns, and rusts

COLOR CONSISTENCY PER PALLET

somewhat consistent

WEIGHT CALCULATED IN INCHES

l x w x h / 1728 (inches cubed) x 170
= approx 170 pounds per cubic foot

PALLET

FULL VENEER: N/A (Natural Thin Veneer Only)
THIN VENEER: 10-15 lbs/ft²; Qty Bx or Sm Bx
Qty Bx- 100 sq ft flats and 50 lineal ft corners
Sm Bx- (24) 8 sq ft flats (192 sq ft) and
(20) 8 lineal ft corners (160 lineal ft)

THIN VENEER

COMMON COVERAGE PER BOX *Est. (can vary)

Figured for Drystack Joint Only
8 & 100 square feet

HIGHLAND GRAY TAILORED FIELDLEDGE

DIMENSIONS

US: inches (average) METRIC: mm (average)

l: 3" to 24" dia. l: 76 to 610 dia.

h: 2"; h: 4"; h: 6" h: 51; h: 102; h: 152

w: 3/4" to 1-1/4" (1") w: 19 to 31 (25)


corner return N/A cr: N/A

note: sawn heights with varying lengths
having rough irregular ends

TYPICAL PIECE

ends irregular; random lengths;
sawn top and bottom; sides not square;
bedface face and sawn back;
overall appearance of stone will be linear
when installed

CORNER INSTALLATION

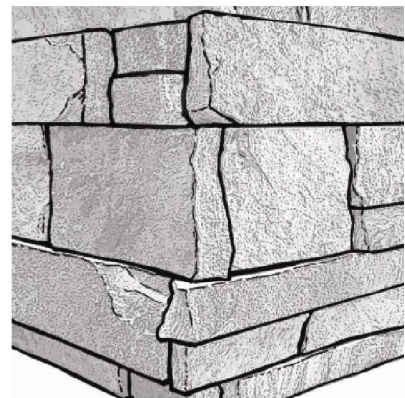

FULL VENEER (N/A)

HIGHLAND GRAY TAILORED FIELDLEDGE

NTV (NATURAL THIN VENEER) ONLY

Highland Scotch Tailored Fieldledge is a Thin Veneer product only; so there is no applicable Full Veneer spec information to report. Please find detailed data for this Thin Veneer product listed in the far right column. Thank you.

PART NUMBERS

FULL VENEER

part number: N/A

THIN VENEER

qty bx flat: 1BTVGRA05040QB

sm bx flat: 1BTVGRA05040BX

qty bx corner: 1BTVGRA05540QB

sm bx corner: 1BTVGRA05540BX

ASTM TESTING DATA

HIGHLAND GRAY C97

water absorption—1.4%

HIGHLAND GRAY C97

specific gravity—2.54

HIGHLAND GRAY C97

density—158.4 pcf

HIGHLAND GRAY C99

modulus of rupture perpendicular

dry—2,460 psi

modulus of rupture perpendicular

wet—2,050 psi

modulus of rupture parallel wet—1,308 psi

HIGHLAND GRAY C170

compressive strength parallel

wet—14,180 psi

compressive strength perpendicular

wet—12,920 psi



www.buechelstone.com