

MOSAIC

JUTE CLOTH WEBWALL



GEOLOGY: limestone

BASIC USE

exterior walls of buildings and fireplaces
stone shall be mortared in

COLOR RANGE

brown to buff

COLOR CONSISTENCY PER PALLET

consistent

WEIGHT CALCULATED IN INCHES

l x w x h / 1728 (inches cubed) x 170
= approx 170 pounds per cubic foot

PALLET

FULL VENEER: 4,000 pounds
THIN VENEER: 10-15 lbs/ft²; Qty Bx or Sm Bx
Qty Bx- 100 sq ft flats and 50 lineal ft corners
Sm Bx- (24) 8 sq ft flats (192 sq ft) and
(20) 8 lineal ft corners (160 lineal ft)

FULL VENEER

COMMON COVERAGE ^{*Est. (can vary)}

Standard Joint	Drystack	Overgrout
40 square feet / ton	30 ft ² /ton	50 ft ² /ton

JUTE CLOTH WEBWALL


DIMENSIONS

US: inches (average)	METRIC: mm (average)
l: 3" to 16" dia.	l: 76 to 406 dia.
h: 3" to 16" dia.	h: 76 to 406 dia.
w: 3" to 5" (4")	w: 76 to 127 (101)

note: lengths and heights are irregular shapes
3 inches to 16 inches in diameter

TYPICAL PIECE

ends irregular;
natural split sides;
bedface face and back;
stone is random shapes

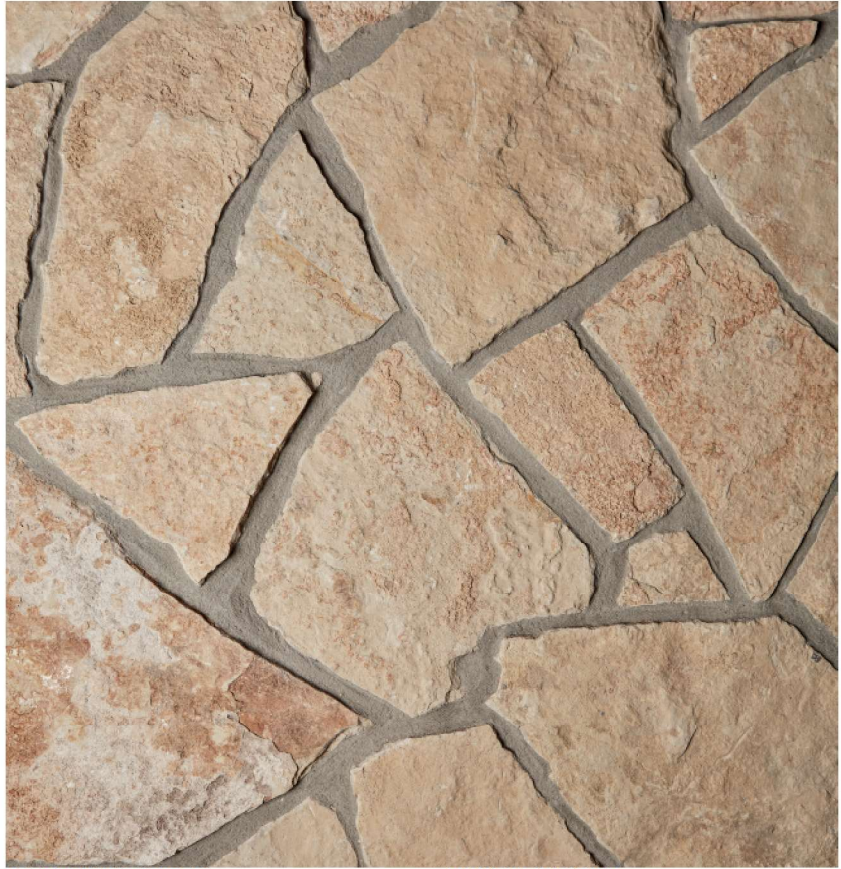

PART NUMBERS

FULL VENEER

part number: 1BSTKNS01008TN

THIN VENEER

qty bx flat: 1BTVKNS01008QB
sm bx flat: 1BTVKNS010086BX
qty bx corner: 1BTVKNS01508QB
sm bx corner: 1BTVKNS01508BX

THIN VENEER

COMMON COVERAGE PER BOX ^{*Est. (can vary)}

Standard Joint	Drystack	Overgrout
8 & 100 square feet	6 & 75 ft ²	10 & 110 ft ²

JUTE CLOTH WEBWALL

DIMENSIONS

US: inches (average)	METRIC: mm (average)
l: 3" to 12" dia.	l: 76 to 304 dia.
h: 3" to 12" dia.	h: 76 to 304 dia.
w: 3/4" to 1-1/4" (1")	w: 19 to 31 (25)

corner return 3" to 5" cr: 76 to 127
note: lengths and heights are irregular shapes
3 inches to 12 inches in diameter

TYPICAL PIECE

ends irregular;
natural split sides;
bedface face and sawn back;
stone is random shapes

ASTM TESTING DATA

JUTE CLOTH C97 water absorption—10.03%
specific gravity — 1.995 to 2.008
density—125.1 lbs/ft³

JUTE CLOTH C170

dry perpendicular—4,040 psi
wet perpendicular—1,830 psi
dry parallel —3,210 psi
wet parallel—1,480 psi

JUTE CLOTH C880

flexural strength-wet —440 psi
flexural strength-dry —600 psi



www.buechelstone.com