



## TAILORED FIELDLEDGE

### BARNWOOD BLUE TAILORED FIELDLEDGE

**GEOLOGY:** schist - quarried in USA

#### COLOR RANGE

grays, dark grays, charcoals, whites, blues, tans, with occasional greens, buffs and blacks

#### COLOR CONSISTENCY PER PALLET

somewhat consistent

#### PALLET

FULL VENEER: N/A

THIN VENEER: 10-15 lbs/ft<sup>2</sup>; Qty Bx or Sm Bx

Qty Bx-100 sq ft flats and 50 lineal ft corners

Sm Bx- (24) 8 sq ft flats (192 sq ft) and

(20) 8 lineal ft corners (160 lineal ft)

#### ASTM TESTING DATA

**BARNWOOD BLUE C97**

water absorption—0.5%

**BARNWOOD BLUE C97**

specific gravity—2.75

**BARNWOOD BLUE C97**

density—171.8 pcf

**BARNWOOD BLUE C99**

modulus of rupture perpendicular

dry—3,490 psi

modulus of rupture perpendicular

wet—2,920 psi

**BARNWOOD BLUE C170**

compressive strength parallel dry—12,260 psi

compressive strength parallel wet—9,770 psi

compressive strength perpendicular

dry—15,300 psi

compressive strength perpendicular

wet—11,220 psi

#### PART NUMBERS

**FULL VENEER:**

N/A

**THIN VENEER:**

Qty Bx flat: 1BTVGRA03061QB- Sold per pallet

Sm Bx flat: 1BTVGRA03061BX- Sold per box

Qty Bx corner: 1BTVGRA03561QB- Sold per pallet

Sm Bx corner: 1BTVGRA03561BX- Sold per box

#### THIN VENEER

**COMMON COVERAGE PER BOX** \*Est.(can vary)

Figured for Drystack Joint Only

8 & 100 square feet

l: 3" to 24" (8")

h: 2"; h: 4"; h: 6"

w: 3/4" to 1-1/4" (1")

corner return N/A- Butt Jointed

note: sawn heights with varying lengths

having rough irregular ends

#### TYPICAL PIECE

Ends irregular; random lengths;


sawn top and bottom; sides not square;

bedface and split face and sawn back;

overall appearance of stone will be linear

when installed.

SEE CORNER EXAMPLE TO THE RIGHT

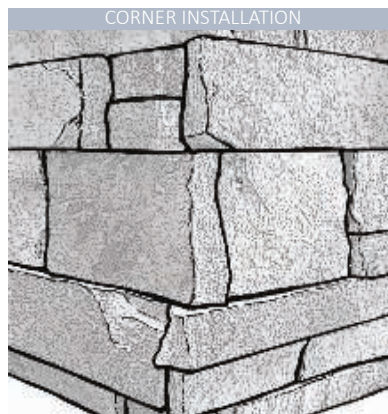

CORNER INSTALLATION

#### ARCHITECT/DESIGNER INFO

##### MATERIAL BANK

SKU: SM07001



##### INSTALLATION SHOWN

Mortar: Laticrete MVIS

Joint Type: Drystack

##### BIM DETAILS

Revit, Hatch Patterns,

Seamless Textures, 3-Part

Specs, DWGS, SDS,

Warranty

