

TAILORED FIELDLEDGE



BLACK FROST

TAILORED FIELDLEDGE

GEOLOGY: quartzitic sandstone- quarried in USA

COLOR RANGE

blacks, charcoals, grays, blues, whites, with occasional greens, buffs, and browns

COLOR CONSISTENCY PER PALLET

somewhat consistent

PALLET

FULL VENEER: N/A

THIN VENEER: 10-15 lbs/ft²; Qty Bx or Sm Bx
Qty Bx- 100 sq ft flats and 50 lineal ft corners
Sm Bx- (24) 8 sq ft flats (192 sq ft) and
(20) 8 lineal ft corners (160 lineal ft)

ASTM TESTING DATA

BLACK FROST C97

water absorption—0.2%

BLACK FROST C97

specific gravity—3.051

BLACK FROST C97

density—190.4 pcf

BLACK FROST C99

modulus of rupture dry—3,040 psi

modulus of rupture wet—2,610 psi

BLACK FROST C170

compressive strength parallel

dry—15,070 psi

compressive strength parallel

wet—12,070 psi

compressive strength perpendicular

dry—25,340 psi

compressive strength perpendicular

wet—15,070 psi

PART NUMBER

FULL VENEER:

N/A

THIN VENEER:

Qty Bx flat: 1BTVGRA03063QB- Sold per pallet

Sm Bx flat: 1BTVGRA03063BX- Sold per box

Qty Bx corner: 1BTVGRA03563QB- Sold per pallet

Sm Bx corner: 1BTVGRA03563BX- Sold per box

ARCHITECT/DESIGNER INFO

MATERIAL BANK

SKU: SM07002



INSTALLATION SHOWN

Mortar: Laticrete MVIS


Joint Type: Drystack

BIM DETAILS

Revit, Hatch Patterns,
Seamless Textures, 3-Part
Specs, DWGS, SDS,
Warranty



CORNER INSTALLATION

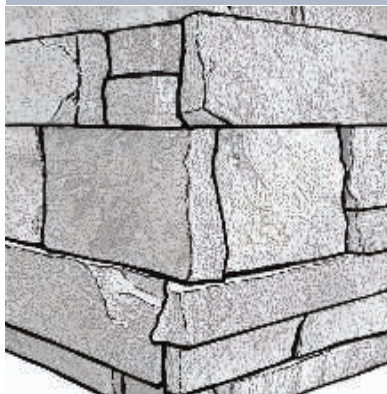

THIN VENEER

COMMON COVERAGE PER BOX ^{*Est.(can vary)}

Figured for Drystack Joint Only

8 & 100 square feet

DIMENSIONS

l: 3" to 24" (8")

h: 2"; h: 4"; h: 6"

w: 3/4" to 1-1/4" (1")

corner return N/A- Butt Jointed

note: sawn heights with varying lengths
having rough irregular ends

TYPICAL PIECE

Ends irregular; random lengths;
sawn top and bottom; sides not square;
bedface and split face and sawn back;
overall appearance of stone will be linear
when installed.

SEE CORNER EXAMPLE TO THE LEFT