

TAILORED FIELDLEDGE



HIGHLAND SCOTCH

TAILORED FIELDLEDGE

GEOLOGY: schist- quarried in USA

COLOR RANGE

buffs, tans, golds, oranges, browns, grays, yellows, rusts, and whites with occasional burgundy and black

COLOR CONSISTENCY PER PALLET

somewhat consistent

PALLET

FULL VENEER: N/A

THIN VENEER: 10-15 lbs/ft²; Qty Bx or Sm Bx
Qty Bx- 100 sq ft flats and 50 lineal ft corners
Sm Bx- (24) 8 sq ft flats (192 sq ft) and
(20) 8 lineal ft corners (160 lineal ft)

ASTM TESTING DATA

HIGHLAND SCOTCH C97

water absorption—1.4%

HIGHLAND SCOTCH C97

specific gravity—2.54

HIGHLAND SCOTCH C97

density—158.4 pcf

HIGHLAND SCOTCH C99

modulus of rupture perpendicular

dry—2,460 psi

modulus of rupture perpendicular

wet—2,050 psi

modulus of rupture parallel wet—1,308 psi

HIGHLAND SCOTCH C170

compressive strength parallel

wet—14,180 psi

compressive strength perpendicular

wet—12,920 psi

PART NUMBER

FULL VENEER:

N/A

THIN VENEER:

Qty Bx flat: 1BTVGRA03060QB- Sold per pallet

Sm Bx flat: 1BTVGRA03060BX- Sold per box

Qty Bx corner: 1BTVGRA03560QB- Sold per pallet

Sm Bx corner: 1BTVGRA03560BX- Sold per box

ARCHITECT/DESIGNER INFO

MATERIAL BANK

SKU: SM07005




INSTALLATION SHOWN

Mortar: Laticrete MVIS

Joint Type: Drystack

BIM DETAILS

Revit, Hatch Patterns,
Seamless Textures, 3-Part
Specs, DWGS, SDS,
Warranty

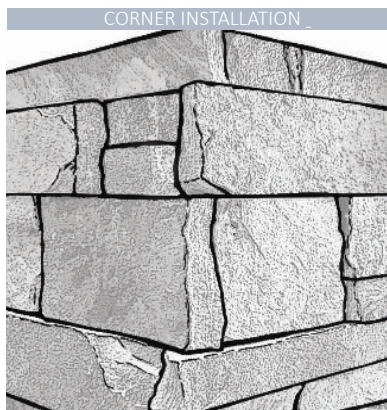

CORNER INSTALLATION

THIN VENEER

COMMON COVERAGE PER BOX ^{*Est.(can vary)}

Figured for Drystack Joint Only

8 & 100 square feet

DIMENSIONS

l: 3" to 24" (8")

h: 2"; h: 4"; h: 6"

w: 3/4" to 1-1/4" (1")

corner return N/A- Butt Jointed

note: sawn heights with varying lengths
having rough irregular ends

TYPICAL PIECE

Ends irregular; random lengths;
sawn top and bottom; sides not square;
bedface and split face and sawn back;
overall appearance of stone will be linear
when installed.

SEE CORNER EXAMPLE TO THE LEFT