



PANEL INSTALLATION SHOWN

Mortar: Laticrete MVIS
 Joint Type: Drystack
 Size- h: 4" & 8" & random length- natural cleft shown in Buff Gray color range

COMMON APPLICATIONS

- Chilton
- ACCESSORIES _____
(e.g. quoins, keystones, light mounts)
- DOOR & WINDOW SURROUNDS _____
- FIREPLACE SURROUNDS _____
- HEARTHS & MANTELS _____
- PIER CAPS _____
- SILLS _____



CUT STONE
CHILTON
PANELS & CUT STONE
(Buff Gray to left)

GEOLOGY: dolomitic limestone- quarried in USA

COLOR RANGE
 yellows & creams to slight buffs & cool grays, mottled with occasional fossils; swirls are common

COLOR CONSISTENCY PER BLOCK/SLAB
 somewhat consistent depending application

WEIGHT CALCULATED IN INCHES
 l x w x h / 1728 (inches cubed) x 177 = approx 177 pounds per cubic foot

ASTM TESTING DATA
 CHILTON C97 water absorption—0.08%
 CHILTON C97 density—177.4 pcf
 CHILTON C99 modulus of rupture—1,220 psi
 CHILTON C170 compressive strength w/rift—50,560 psi
 compressive strength across rift—38,090 psi
 CHILTON C880 flexural strength—3,070 psi

NATURAL CLEFT COLOR EXAMPLE



ARCHITECT/DESIGNER INFO
MATERIAL BANK

SKU: SM09011



NATURAL CLEFT COLOR EXAMPLE



NATURAL CLEFT COLOR EXAMPLE



BIM DETAILS

Revit, Hatch Patterns,
 Seamless Textures, 3-Part
 Specs, DWGS, SDS,
 Warranty




NATURAL CLEFT COLOR EXAMPLE



NATURAL CLEFT COLOR EXAMPLE



NATURAL CLEFT COLOR EXAMPLE

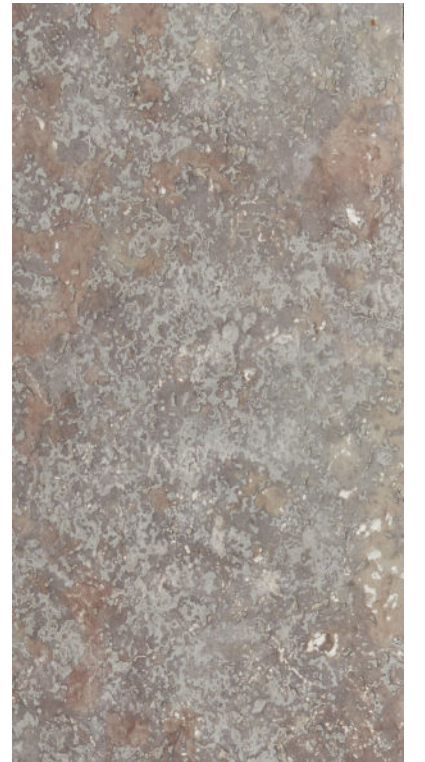

NATURAL CLEFT COLOR EXAMPLE

CUT STONE
CHILTON
PANELS & CUT STONE

